

GW-USB-03-XXX

IQRF USB Gateway

User's Guide

- GW-USB-03-868
- GW-USB-03-916



Simple way to smarter wireless solutions

Description

GW-USB-03 is an IQRF gateway with USB connectivity. It is a part of the IQRF platform intended as an interface between USB and an IQRF network or a portable interface between a human and an IQRF network. It allows to visualise and setup parameters in given application.

GW-USB-03 is a generic equipment, i.e. the hardware is fixed and the user can realize specific functionality by software only. Applications should be developed using the DK-GW-USB-x3-xxx development kit.




Applications

- Home automation
- Portable controller
- Diagnostic tool
- Portable service tool for IQRF network management

Key features

- 8b microcontroller
- USB v2.0 interface
- EEPROM memory
- 3 pushbuttons
- 3 LEDs
- Piezo buzzer
- IQRF transceiver module with on-board antenna
- Backup accumulator
- Very low power consumption in Sleep mode

Block schematics

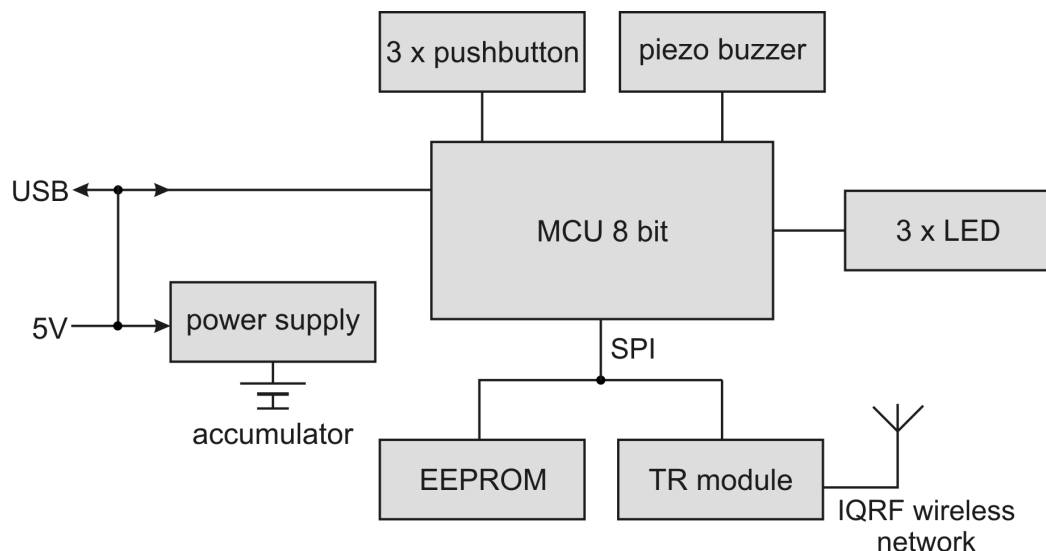

Electrical specifications*(typical values unless otherwise stated)*

Power supply	5.0 ± 0.35 V DC
Accumulator	Li-Pol 3.7V, 400mAh
USB	V2.0 Compliant SIE
Supply current:	
operational:	17 mA ¹
standby:	10 µA ²
accumulator charging:	85 mA
Temperature range:	0 °C to +70 °C
Frequency range:	868 MHz or 916 MHz (according to the TR module)
RF output power:	1.3 mW
Supported TR modules:	TR-868-31BA or TR-916-31BA
Antenna:	PCB on TR module board
Dimensions:	93 mm x 42 mm x 14 mm
Weight:	39 g ³

Note 1: This current is increased due to charging in case of external supply (depended on the accumulator state).**Note 2:** All peripherals shut down.**Note 3:** Including accumulator and TR module.

Absolute maximum ratings

Stresses above those values may cause permanent damage to the device. Exposure to maximum rating conditions for extended periods may affect device reliability.

Supply voltage (VCC):	5.5 V
Storage temperature:	-40 °C to +85 °C

Hardware

GW-USB-03 is a generic equipment, i.e. the hardware is fixed and the user can realize specific functionality by software only. For detailed information refer to DK-GW-USB-x3-xxx User's guide.

Power supply

GW-USB-03 is intended to be supplied via micro USB connector, either from PC or from the adapter. The accumulator serves as a backup for external power source and should be charged from it.

Sleep mode

It is possible to switch off all functions and peripherals for current consumption minimizing, especially in idle or while supplied from the accumulator. Refer to User's guide of given GW application for Sleep mode control. GW power is not switched off, the Sleep mode is used instead of this.

EEPROM memory

Capacity: 64 kb, serial interface SPI (shared with the TR module), 1 000 000 erase/write cycles (typ.).

Pushbuttons and LEDs

Functionality of all three pushbuttons and LEDs is fully under software control.

Beeper

The functionality is fully under software control.

TR module

The TR-xxx-31BA wireless IQRF transceiver module in SIM card format.

Antenna

GW uses the built-in PCB antenna on TR-xxx-31BA module board.

Case

The plastic case is limited to a very few number of open/close cycles only.

Software

For GW functionality refer to User's guide of given GW application.

Pack list

- GW-USB-03-xxx, in Sleep mode
- TR module in requested frequency band, with E07-SPI example programmed, inserted in SIM connector
- Accumulator (soldered)
- Micro USB cable

Ordering codes:

- | | |
|--------------------|-----------------------------------|
| • GW-USB-03-868 | Gateway GW-USB-03, 868 MHz |
| • GW-USB-03-916 | Gateway GW-USB-03, 916 MHz |
| • DK-GW-USB-03-868 | Developemnt kit for GW-USB-03-868 |
| • DK-GW-USB-03-916 | Developemnt kit for GW-USB-03-916 |

Document history

- | | |
|----------|-----------------------------|
| • 090514 | First release |
| • 090626 | GW-USB-03 as generic module |

Sales and Service

Corporate office:

MICRORISC s.r.o., Delnicka 222, 506 01 Jicin, Czech Republic, EU
Tel: +420 493 538 125, Fax: +420 493 538 126, www.microrisc.com

Partners and distribution:

Please visit www.iqrf.org/partners

Quality management:

ISO 9001 : 2000 certified

Trademarks:

*The IQRF name and logo are registered trademarks of MICRORISC s.r.o.
PIC, SPI, Microchip, RFM and all other trademarks mentioned herein are property of their respective owners.*

Legal:

All information contained in this publication is intended through suggestion only and may be superseded by updates without prior notice. No representation or warranty is given and no liability is assumed by MICRORISC s.r.o. with respect to the accuracy or use of such information.

Without written permission it is not allowed to copy or reproduce this information, even partially.

No licenses are conveyed, implicitly or otherwise, under any intellectual property rights.

The IQRF products utilize several patents (CZ, EU, US)

On-line support: <http://iq-esupport.com>



Simple way to smarter wireless solutions